




6505® MICRO™

Amplifier

Operating
Manual

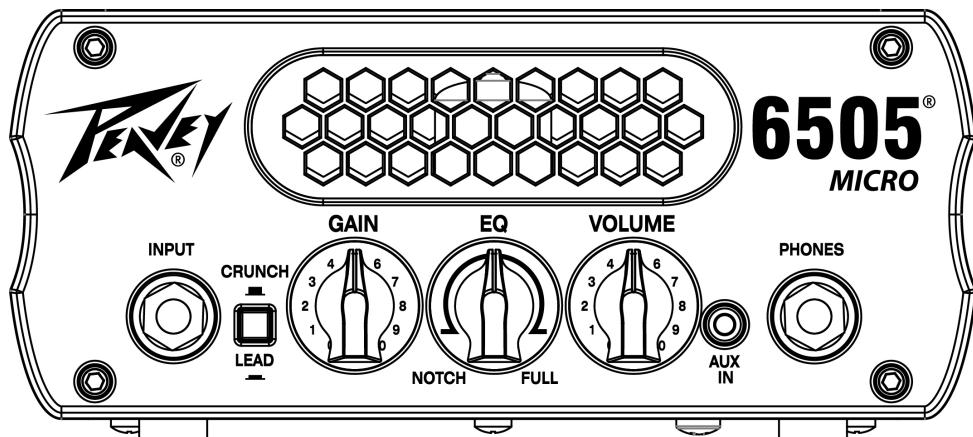



FCC/ICES Compliancy Statement

This device complies with Part 15 of the FCC rules and Industry Canada license-exempt RSS Standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Warning: Changes or modifications to the equipment not approved by Peavey Electronics Corp. can void the user's authority to use the equipment.

Note – This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.



6505® MICRO™

Tube Amplifier

Congratulations on your purchase of the all-new 6505 MICRO Head! This minuscule little beast harnesses the character and “crunch” and “lead” tones of it’s much larger all-tube siblings in a super-small and convenient package capable of up to a mighty 20 Watts (4 Ohms). A single 12AX7 tube compliments the gain structure in the most critical stages. This little guy sounds increasingly amazing and familiar on larger cabinets with more premium drivers, such as the 112-6, 212-6, and the legendary 6505 412 cabs. The minimalist controls and extremely robust construction make this a must-have “Swiss army knife” tool for live and recording use. Use the headphone jack & aux input for practice, connect the effects send to the input of a larger amp to use it as a “6505 preamp driver”, great for quick and easy “re-amping”, and any number of applications that you can dream up.

Read this manual thoroughly before use, keep your volume level in check and enjoy!


Features:

- * 20W (RMS) into 4 Ohms
- * 12AX7/ECC83 Preamp Tube
- * Speaker Output
- * Crunch/Lead Switch
- * Single Knob EQ to morph through popular 6505 settings
- * Auxiliary Input
- * Buffered Effects Loop
- * Bulletproof Metal Enclosure




VENTILATION: For proper ventilation, allow 24" clearance from nearest combustible surface.

Front Panel

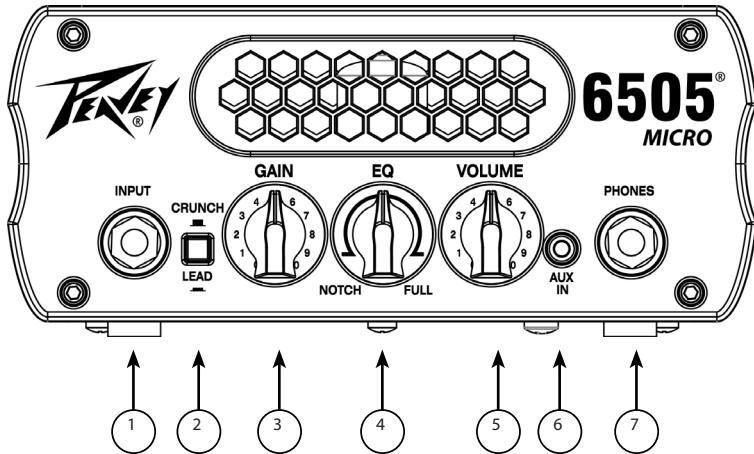

- 1 INPUT - Used for most electric guitars. Plug your guitar into this jack using a high-quality shielded instrument cable for low noise.
- 2 CRUNCH/LEAD - This switch toggles the preamp from CRUNCH to LEAD gain modes. CRUNCH is typical of the “crunch” setting on the original 6505 rhythm channel with the bright boost included and LEAD is typical of the classic 6505 high-gain lead sound.
- 3 GAIN - This controls the input level of the amplifier, as it feeds the first JFET gain stage. Clockwise adjustment of this control will result in a hotter and more “responsive” signal to the amplifier input circuit.
- 4 EQ - This control “morphs” from a 6505 “notched” 3-band EQ setting (10-0-7) in the NOTCH position, to the more common “7-7-7” setting at about halfway, and up to full on midrange (10-10-10) at its full clockwise position.
- 5 VOLUME - This control adjusts the overall volume of the preamp as it is fed into the power amp section.
- 6 AUX IN - This 1/8” stereo input is provided to insert a full-range audio source into the signal chain, such as a portable MP3 player or other media device.
- 7 PHONES - This stereo 1/4” jack is provided to drive most common studio headphones.

Rear Panel

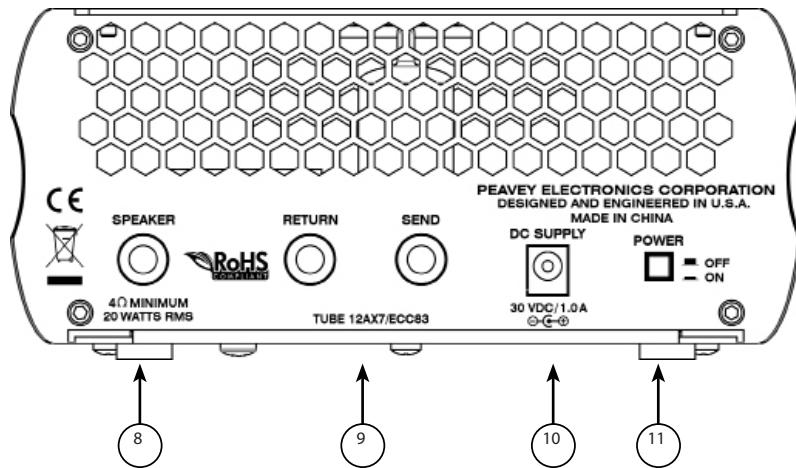

- 8 SPEAKER - This ¼" mono jack is provided for connection of an external speaker cabinet. Minimum load impedance is 4 Ohms.
- 9 EFFECTS LOOP SEND and EFFECTS LOOP RETURN
1/4" output jack for supplying signals to external effects or signal processing equipment and 1/4" input for returning signals from external effects or signal processing equipment.
- 10 DC SUPPLY - This jack is provided for connection of the included +30VDC power supply. NOTE: PLEASE USE ONLY THE SUPPLIED POWER ADAPTOR (Peavey #30908151) TO POWER YOUR 6505 MICRO.
- 11 POWER - This switch applies or removes DC power to the internal circuitry.



Product Specifications

Power Amplifier Section:

Rated Power & Load: 20W(rms) into 4 Ohms; 15W(rms) into 8 Ohms; 10W(rms) into 16 Ohms
DC Supply (included): +30VDC @ 1ADC (positive tip); Peavey part #30908151

Preamp Section:

Specs are measured @ 1kHz with all controls set halfway (12 o'clock) on CRUNCH setting

Input:

Impedance: 1M Ohms; Nominal Input Level: -20dBV, 100mV(rms)

Effects Loop Send:

Load Impedance: 10k Ohms or greater; Nominal Output Level: 0dBV, 1.0V(rms)

Effects Loop Return:

Impedance: 1M Ohms; Designed Input Level: 0dBV, 1.0V(rms)

(Switching jack provides preamp output to power amp input connection when not used)

Aux Input:

Nominal Input Level: 0dBV, 1.0V(rms)

Dimensions & Weight:

5.2" (132mm) L x 7.0" (178mm) W x 3.2" (82mm) H;

2.5 lbs (1.13 kg)

NOTE: Specifications are subject to change without notice.



www.peavey.com

Warranty registration and information for U.S. customers available online at
www.peavey.com/warranty
or use the QR tag below



Features and specifications subject to change without notice.

Peavey Electronics Corporation 5022 Hartley Peavey Drive Meridian, MS 39305 (601) 483-5365 FAX (601) 486-1278



Logo referenced in Directive 2002/96/EC Annex IV
(OJ(L)37/38,13.02.03 and defined in EN 50419: 2005
The bar is the symbol for marking of new waste and
is applied only to equipment manufactured after
13 August 2005