

Model: Composite Acoustics™ GX

Available Finishes: High gloss Carbon Burst or Wine Red Burst



FEATURES

- All Composite Acoustically Tailored™ construction for ultimate tone, durability and versatility
- Rigid one-piece neck/body construction for long-term stability
- Impervious to climate for consistent performance, wherever you go
- 14 fret to the body Carbon fiber neck for consistent playability (No truss rod adjustments needed, EVER!)
- Slender ergonomic design, voiced to extend low end response
- 15 degree headstock pitch
- Available with 1.75" nut width or new "Narrow Neck" 1.69" nut width
- Proprietary carbon fiber bridge and saddle materials for maximum sound transfer
- Available with the Fishman® Prefix Plus T or Fishman Aura® pickup/preamp systems
- Center sound hole with abalone sound hole ring
- Performance tuned lightweight carbon fiber bracing
- Ultra-precise tuning machines with 18:1 ratio
- Proprietary Reinforced Polymer Fretboard with 20 medium stainless steel frets, top dots & side dots
- Handcrafted in the USA by skilled technicians and craftsmen
- Hardshell case included
- Ships with Elixir® Nanoweb® strings, .012-.053

SPECIFICATIONS

Neck Material: Carbon Fiber

Frets: 2.13 mm wide, .99mm tall, Stainless Steel

Neck Type: "C" neck shape

Bridge: Proprietary Carbon Composite

Hardware Color: Black Chrome

Pickup: Fishman Prefix Plus T (standard)

Fingerboard: Proprietary Reinforced Polymer

Fishman® Aura® (premium upgrade)

Inlays: Side marker, aluminum dot

The Fishman Aura system includes 6 images of the GX model:

1. DPA 4011 small diaphragm condenser
2. Neumann M147 large diaphragm condenser
3. Shure® Beta58® dynamic cardioid
4. Neumann KM84 small diaphragm condenser
5. Neumann U87 large diaphragm condenser
6. Schoeps CMC64g small diaphragm condenser

The Aura allows for separate EQ'ng of the pickup and images, as well as separate phase control.

*See www.fishman.com for detailed specifications of on-board electronics

NECK DIMENSIONS

Scale/Length: 25.5", 20 frets

a. Width at Nut:

Regular: 1.75" (44.45mm)

Narrow Neck: 1.69" (42.93mm)

b. Width at Last Fret:


Regular: 2.25" (57.15mm)

Narrow Neck: 2.125" (53.98mm)

c. Thickness at 1st Fret: .81" (20.57mm)

d. Thickness at 12th Fret: .86" (21.84mm)

Radius: 14"

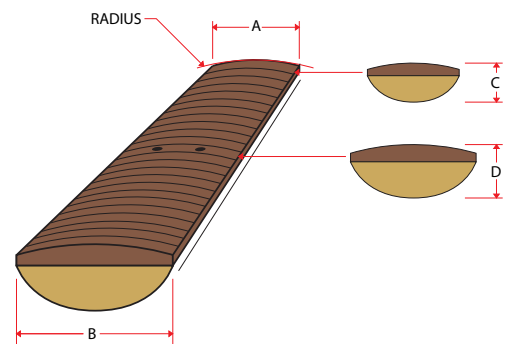

String Height Specification

1st Fret

12th Fret

E6-0.0240"

E6-0.0938" 3/32"

A5-0.0220"

A5-0.0938" 3/32"

D4-0.0220"

D4-0.0938" 3/32"

G3-0.0220"

G3-0.0781" 5/64"

B2-0.0200"





B2-0.0781" 5/64"

E1-0.0190"

E1-0.0781" 5/64"

GX Basic Dimensions

Narrow Neck

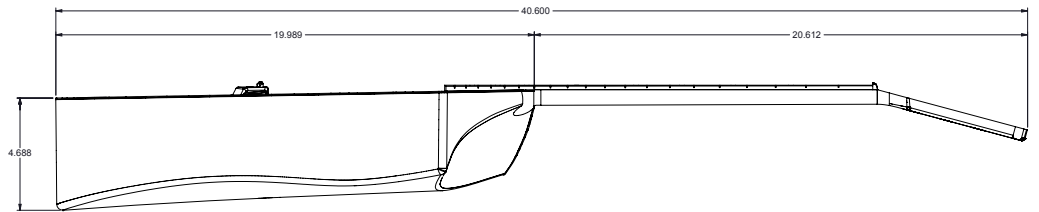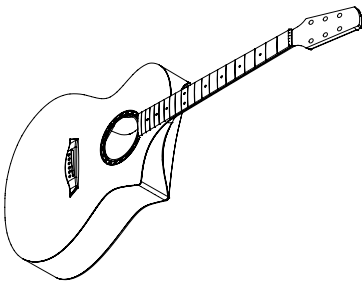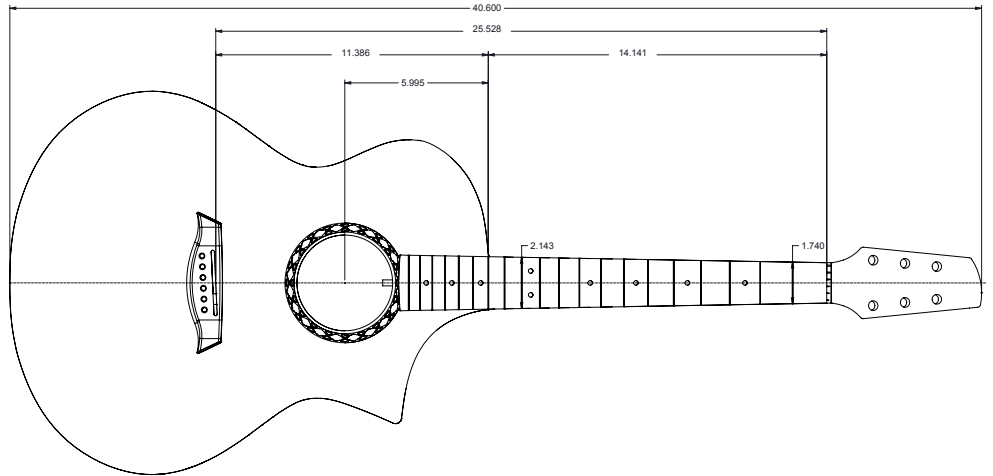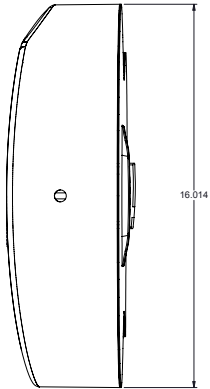

Wide Neck

