

Model: Composite Acoustics™ OX

Available Finishes:

High gloss Carbonburst, Solid Red, Solid Blue, Solid Metallic, Charcoal, Solid White or in our Satin Back RAW carbon fiber top finish



FEATURES

- All Composite Acoustically Tailored™ construction for ultimate tone, durability and versatility
- Rigid one-piece neck/body construction for long-term stability
- Impervious to climate for consistent performance, wherever you go
- 14 fret to the body Carbon fiber neck for consistent playability (No truss rod adjustments needed, EVER!)
- Proprietary Reinforced Polymer Fretboard with 20 medium stainless steel frets, top dots & side dots
- 15 degree headstock pitch
- Proprietary carbon fiber bridge and saddle materials for maximum sound transfer
- Available with the L.R. Baggs Stage Pro Pick-up system with on-board EQ and Tuner
- Center sound hole with brushed stainless sound hole ring
- Performance tuned lightweight carbon fiber bracing
- Ultra-precise tuning machines with 18:1 ratio
- Handcrafted in the USA by skilled technicians and craftsmen
- Lite case included
- Ships with Elixir® Nanoweb® strings, .012-.053

SPECIFICATIONS

Neck Material: Carbon Fiber

Inlays: Side marker, aluminum dot

Neck Type: "C" neck shape

Frets: 2.13 mm wide, .99mm tall, Stainless Steel

Hardware Color: Black Chrome

Bridge: Proprietary Carbon Composite

Fingerboard: Proprietary Reinforced Polymer

Pickup: L.R. Baggs Stage Pro Element*

*See www.lrbaggs.com for detailed specifications of on-board electronics

NECK DIMENSIONS

Scale/Length: 25.5", 20 frets


a. Width at Nut: 1.75" (44.45mm)

b. Width at Last Fret: 2.125" (53.98mm)

c. Thickness at 1st Fret: .81" (20.57mm)

d. Thickness at 12th Fret: .86" (21.84mm)

Radius: 14"

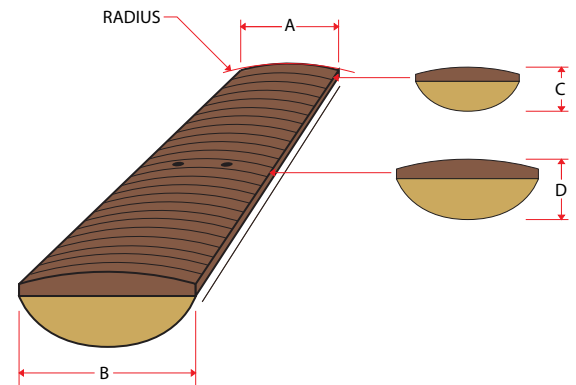

String Height Specification

1st Fret

12th Fret

E6-0.0240"

E6-0.0938" 3/32"

A5-0.0220"

A5-0.0938" 3/32"

D4-0.0220"

D4-0.0938" 3/32"

G3-0.0220"

G3-0.0781" 5/64"

B2-0.0200"

B2-0.0781" 5/64"

E1-0.0190"

E1-0.0781" 5/64"

OX Basic Dimensions

